



BUILDSHIELD TERMITE AND BUILDSHIELD FIRESTOP PROTECTION ARE A 2 PART SYSTEM CONSISTING OF A PVC EXTRUSION AND AN ADHESIVE STAINLESS STEEL BARRIER. THE COMBINATION OF INEDIBLE PLASTIC AND HIGH STRENGTH PUNCTURE RESISTANT STAINLESS STEEL CREATES AN IMPENETRABLE BARRIER TO TERMITE INTRUSION INTO YOUR HOME OR STRUCTURE.

BUILDSHIELD FIRESTOP PROTECTION CREATES A BARRIER BRIDGING THE EPS FOAM AT THE TOP OF A WALL AND BETWEEN FLOORS IN ICF STRUCTURES, ENSURING THAT HOT GASES FROM A FIRE DO NOT TRAVEL UP THE WALL, PREVENTING FASTER SPREAD OF THE FLAMES THROUGH THE STRUCTURE.

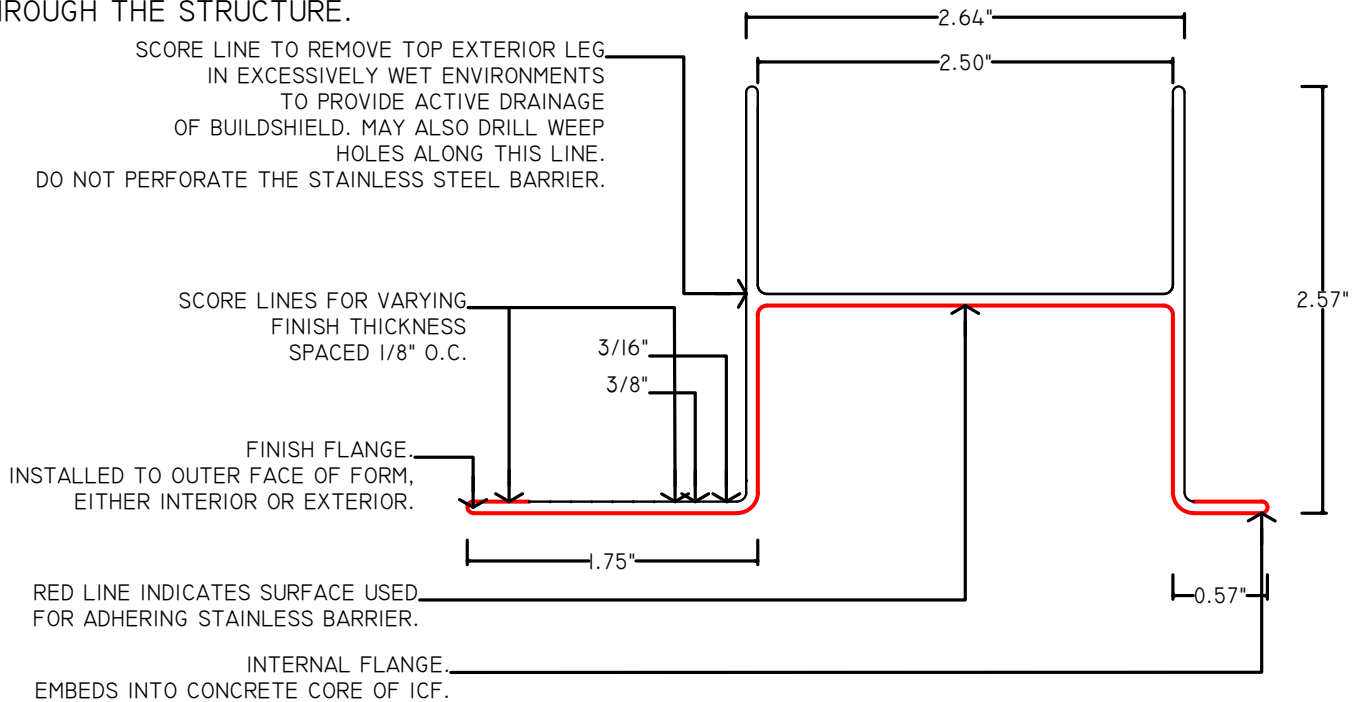

THE STAINLESS STEEL BARRIER PROVIDES A GAPLESS SEAL ALONG THE LENGTH OF THE EXTRUSION. SEAMS IN THE STAINLESS STEEL BARRIER SHOULD BE OVERLAPPED 2 INCHES. THE EXTRUSION SHAPES THE STAINLESS STEEL BARRIER EMBEDDING THE WRAPPED FLANGES INTO THE CONCRETE CORE, EXTERIOR WALL FINISHES, OR INTERIOR FLOOR SLAB. THE EXTRUSION ENSURES THAT THE BARRIER IS PROPERLY POSITIONED THROUGHOUT THE ENTIRE CONSTRUCTION PROCESS.

 <p>9705 N. BROADWAY EXTENSION, SUITE 200, OKLAHOMA CITY, OK 73114 OFFICE: 405-840-3386   TOLL FREE: 866-222-2575   FAX: 831-597-0792 BUILDBLOCK.COM</p>	<b>BUILDSHIELD PRODUCT DETAIL</b>			DATE/REV 12/2015	SCALE NTS	DETAIL SHEET
	NOTES					
	CONSTRUCTION SHALL BE IN ACCORDANCE WITH ALL APPLICABLE LOCAL AND NATIONAL CODES. ALL DRAWINGS ARE SUBJECT TO CHANGE WITHOUT NOTICE.					
<h1>63A</h1>						