


16 FT BUILDRADIUS FORM SPECIFICATIONS		
	IMPERIAL	METRIC
BLOCK ANGLE	11.25°	11.25°
OUTSIDE PANEL AREA	2.67FT <sup>2</sup>	.2477m <sup>2</sup>
INSIDE PANEL AREA	2.42FT <sup>2</sup>	.2251m <sup>2</sup>
OUTER PANEL ARC LENGTH	2FT 0IN	60.96M
INNER PANEL ARC LENGTH	1-FT 9-13/16-IN	55CM
OUTER RADIUS	10-FT 2-1/4-IN	310.47CM
INNER RADIUS	9-FT 3-1/4-IN	282.54CM
STRAIGHT SECTION LENGTHS	0-IN	0-CM
CONCRETE VOLUME	0.04715 YD <sup>3</sup>	0.036048 m <sup>3</sup>

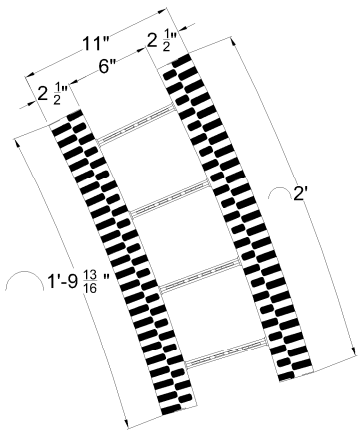

- NOTES:**
1. BUILDRADIUS FORMS ARE SIZED BY THE LENGTH OF THE OUTER PANEL AT 90° ARC. THE RADIUS AND DIAMETER OF THE FORMS ARE GIVEN IN THE ACCOMPANYING CHART.
  2. TO CREATE A RUNNING BOND WHEN INTEGRATING WITH A STRAIGHT BLOCK WALL, CUT THE FORM IN HALF, VERTICALLY AT THE CENTERLINE (CL) USING ONE HALF OF THE BLOCK AT EACH END ON EVERY COURSE.
  3. BLOCK COURSING 1'-4".