
ALL VERTICAL STEEL SHALL BE PLACED IN CENTER OF CORE. BARS ARE SHOWN SEPARATE IN DIAGRAM FOR CLARITY.

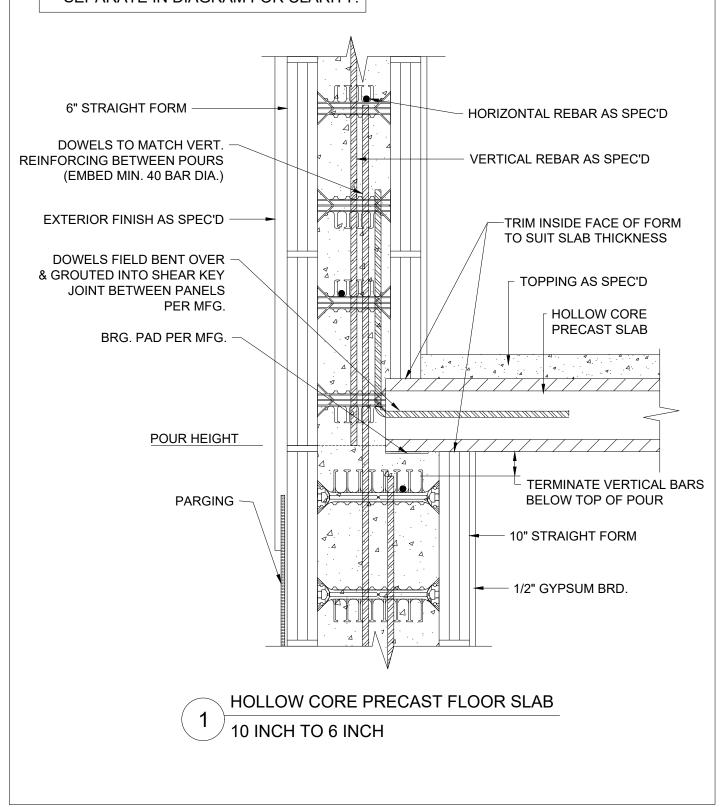

BUILDING SYSTEMS LLC

BUILDBLOCK.COM TOLL FREE 1-866-222-2575

NOTE: CONSTRUCTION SHALL BE IN ACCORDANCE WITH ALL APPLICABLE LOCAL & NATIONAL CODES. THIS DOCUMENT IS PROVIDED AS A BENEFIT. IT IS THE RESPONSIBILITY OF THE USER TO MODIFY THIS DOCUMENT ACCORDING TO APPLICABLE LOCAL AND NATIONAL CODES & TO RESEARCH & UNDERSTAND SAFE METHODS OF USE & HANDLE OF PRODUCT. ALL DRAWINGS ARE SUBJECT TO CHANGE WITHOUT NOTICE. BUILDBLOCK ASSUMES NO LIABILITY FROM THE USE OF THIS DOCUMENT.

10 INCH TO 6 INCH HOLLOW CORE PRECAST FLOOR ON SLAB, EXTERIOR BEARING WALL

DATE / REVISION / BY	7-3-23 / 1 / AQ
SCALE	NTS
FILE NAME	4.049 - BL1000