

BUILDBLOCK® BUILDING SYSTEMS U.S. ENGINEERING TABLES

HIGH WIND LOAD LINTEL TABLES FOR 4" ICF LINTELS

Reinforcement In 4" Thick, 16" High Concrete Lintel FBC 2004/ACI 318-05

Opening Width [ft]	Uniformly Distributed Load [lb/ft] [‡]									
	350		850		1350		1850		2350	
	Bottom Steel	Stirrup End Dist. [in]	Bottom Steel	Stirrup End Dist. [in]	Bottom Steel	Stirrup End Dist. [in]	Bottom Steel	Stirrup End Dist. [in]	Bottom Steel	Stirrup End Dist. [in]
3	1-#4	0	1-#4	6	1-#4	12	1-#4	12	1-#4	12
4	1-#4	0	1-#4	12	1-#4	18	1-#4	18	1-#4	18
6	1-#4	6	1-#4	24	1-#5	30	1-#5	30	1-#6	30
8	1-#4	18	1-#5	36	1-#6	42	1-#7 [‡]	42		
10	1-#4	30	1-#6	48						
12	1-#5	42	1-#7 [¥]	60						
14	1-#6	54								

Assumptions:

6" bearing on each side

#3 Stirrups @ 6 in. o.c. - As needed

Max 2 stories (1 structural floor and roof)

¥ Can be substituted for 1-#5 + 1-#6

‡ Can be substituted for 2-#5

‡ These are service level or working loads


$f'_c =$ 3000 psi Concrete

$f_y =$ 60 ksi Rebar

$f_y =$ 40 ksi Stirrups

$h =$ 16 in

$b =$ 4 in

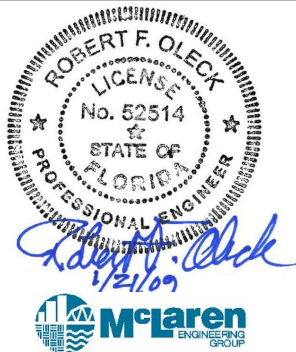

9701 N. Broadway Extension
Oklahoma City, Oklahoma 73114
www.buildblock.com

Office: (405) 840-3386
Fax: (831) 597-0792
Toll Free: 1(866) 222-2575

Reinforcement In
4" Thick, 16" High
Concrete Lintel

TABLE NUMBER

1-C